

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 562 979 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
23.10.1996 Bulletin 1996/43

(51) Int. Cl.<sup>6</sup>: **B41J 17/36**

(21) Application number: 93420124.5

(22) Date of filing: 23.03.1993

**(54) Non-volatile memory thermal printer cartridge**

Kassette mit einem nichtlöschbaren Speicher für Thermo-Drucker

Cassette avec mémoire rémanente pour imprimante thermique

(84) Designated Contracting States:  
DE FR GB

(30) Priority: 27.03.1992 US 858731

(43) Date of publication of application:  
29.09.1993 Bulletin 1993/39

(73) Proprietor: **EASTMAN KODAK COMPANY**  
Rochester, New York 14650-2201 (US)

(72) Inventor: **Stephenson, Stanley Ward,**  
c/o Eastman Kodak Comp.  
Rochester, New York 14650-2201 (US)

(74) Representative: **Buff, Michel et al**  
Kodak-Pathé  
Département des Brevets et Licences CRT  
Centre de Recherches et de Technologie  
Zone Industrielle  
71102 Chalon sur Saône Cédex (FR)

(56) References cited:

US-A- 4 710 781                      US-A- 4 786 917

- PATENT ABSTRACTS OF JAPAN vol. 13, no. 67  
(M-798)(3415) 15 February 1989 & JP-A-63 268  
675 ( MATSUSHITA ELECTRIC IND CO LTD ) 7  
November 1988
- PATENT ABSTRACTS OF JAPAN vol. 9, no. 146  
(M-389)(1869) 21 June 1985 & JP-A-60 023 090 ( MATSUSHITA DENKI SANGYO K.K. ) 5 February  
1985
- PATENT ABSTRACTS OF JAPAN vol. 10, no. 163  
(M-487)(2219) 11 June 1986 & JP-A-61 014 972 ( MINOLTA CAMERA K.K. ) 23 January 1986

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 562 979 B1**

## Description

### Field of the Invention

The present invention relates to thermal printers for printing colored images which uses a carrier having a repeating series of spaced dye frames of different colored dyes.

### BACKGROUND OF THE INVENTION

In one type of thermal printing which prints colored images, a carrier contains a repeating series of spaced frames of different colored heat transferrable dyes. In such apparatus, the carrier is disposed between the receiver and a print head formed of, for example, a plurality of individual heating elements. When a particular heating element is actuated, it produces heat and causes dye from the carrier to transfer to the receiver. The density or darkness of printed colored dye is a function of the energy delivered from the heating element to the carrier.

Thermal dye transfer printers offer the advantage of true "continuous tone" dye density transfer. This result is obtained by varying the energy applied from each heating element, yielding a variable dye density image pixel in the receiver.

In order to produce a colored image, the carrier includes a repeating series of spaced colored dye frames. Such frames are often yellow, magenta and cyan dye frames. The carrier is typically mounted in a cartridge which includes take-up and supply spools. Under the control of a microprocessor, the carrier and receiver are moved past the heating elements which are selectively actuated.

There is a problem with this arrangement in that there sometimes are defective dye frames in the cartridge. If a single dye frame in a series is defective, then an unsatisfactory print will be produced by the thermal printer. Another problem is that the color dye densities in the dye frames may vary from cartridge to cartridge. Since the print head is set up for a standard series of dye frames, this also can caused less than satisfactory prints to be produced.

JP-A-63/268675 describes a cassette for use in a printer and having a memory comprising data representative of the amount of the ink sheet used in the cassette.

### SUMMARY OF THE INVENTION

It is an object of this invention as recited in Claim 1 to provide a simple and effective way of identifying a defective series of dye frames in a cartridge.

It is a further object of this invention to provide for the correction of variations in dye densities from cartridge to cartridge.

This object is achieved in a thermal printer having a cartridge for mounting a carrier, such carrier having

repeating series of dye frames of different colors and a receiver which receives dye from a series of spaced dye frames to form a colored image, such printer including a print head having one or more selectively actuable elements, means for moving the carrier and the receiver along respective paths so as to sequentially move each dye frame of a series and the receiver relative to the print head so that as the elements are actuated, dye from each dye frame of a series is transferred to the receiver and forms a colored image in the receiver, the printer being characterized in that it further comprises :

- (a) means for identifying each particular dye frame series in the carrier and producing a signal;
- (b) non-volatile memory means associated with each cartridge and including data as to the location of each defective series of dye frames in the carrier; and
- (c) computer means responsive to the identifying signals and the stored defective series information for causing the carrier and receiver means to move only non-defective dye series frames in operative relation with the receiver when the print head is actuated.

An advantage of this invention is that if a cartridge is removed from the printer, it can be reinserted and it will control the carrier so that the only non-defective series are moved into operative position in the printer.

Under current carrier production techniques, there can be variations of up to 15% in the dye color density from desired levels in carriers. Another important advantage is that, by having color correction data stored in each non-volatile memory for each cartridge, the process can be controlled by using such stored color correcting data to minimize non-uniformities in output prints.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic of a thermal printer which can be employed to make color images in a receiver in accordance with this invention;

FIG. 2 is a perspective of several heating elements used in the print head of the printer of FIG. 1;

FIG. 3 shows a portion of a typical carrier;

FIG. 4 is an exploded view of a cartridge containing a nonvolatile memory which can be mounted in the printer of FIG. 1; and

FIG. 5 is a flowchart for the correction for a defective series carrier by the printer of FIG. 1.

### DETAILED DESCRIPTION

Referring to FIG. 1, the receiver member 12 is in the form of a sheet and is secured to a rotatable drum 16 which is mechanically coupled to a drive mechanism 15. The drive mechanism 15 continuously advances the drum 16 and the receiver sheet 12 along a path past the

stationary print head 18 during the cycle for actuating elements of the print head 18.

Turning to FIG. 2, we see further details of print head 18. The print head in this embodiment includes a plurality of heating resistors 50 which are pressed against a carrier 14 and force the carrier against the receiver member 12. As shown in FIG. 2, when a switching element 54 is closed, a heating element 50 is connected to a potential source  $V_s$  and actuated. The amount of dye transferred is a function of the time switch 54 is closed.

The carrier member is driven along a path from a supply spool 20 onto a take-up spool 22 by a drive mechanism 23 coupled to the take-up spool 22. The supply and take-up spools are shown in more detail in FIG. 4 which will be discussed later. For clarity of illustration, the cartridge has not been shown in FIG. 1. The drive mechanisms 15 and 23 each include motors which respectively advance the carrier 14 and the receiver 12 in operative relation to the print head 18 as the various heating elements are selectively actuated to transfer dye.

The carrier member 14 is as noted above formed with a repeating series of thermally transferrable dye frames. As shown in FIG. 3, each series includes yellow, magenta and cyan dye frames. A single series is of course used to print one colored image in the receiver 12. As we will see, the present invention corrects for a defective series which would be when at least one dye frame has an incorrect dye color density.

In this disclosure, the term "dye" refers to a colored material which transfers from the carrier to a receiver in response to energy applied by individual elements of the print head 18. Although the print head 18 is shown as having heat resistor elements, those skilled in the art will understand that other sources of energy such as, diode laser array and individual lasers have been and can be effectively used in accordance with this invention. After a colored image is formed in a receiver, the receiver will be referred to as a print.

Referring now to FIGS. 1 and 3, we see that each dye frame extends across the width of the carrier 14. The carrier 14 comprises a leader portion followed by a repeating series of dye frames. The dye frames are contiguous and each series includes in sequence yellow, magenta and cyan dye frames. As shown, there are two LEDs 14a and 14b which illuminate the carrier from above. LED 14a emits yellow light and LED 14b emits red light. Photodetectors A and B are disposed below the carrier and receive light which passes through the carrier. Photodetector A provides a signal to amplifier 17a and photodetector B provides a signal to amplifier 17b. Threshold detectors 17a and 17b respectively are connected to the output of amplifiers 17c and 17d. If the signal produced by an amplifier is above a predetermined threshold level, then a logic 1 is provided by the threshold level detector to a  $\mu$  computer (microcomputer) 17. If it is below a threshold level, then a logic 0 is provided to the microcomputer 17. The microcomputer

17 in response to these signals identifies the start of series and each individual color dye frame in such series. For a more complete discussion of this identification, reference is made to commonly assigned U.S. Patent No. 4,710,781 to Stephenson. It will be understood to those skilled in the art that other types of well known apparatus can be used to identify the start of each series of colored dye frames. See U.S. Patent No. 4,893,951.

Turning now to FIG. 4, we see an exploded view of a cartridge 30 for the web-type carrier 14. The cartridge includes a body 32 which may be formed of an injection molded plastic. The body 32 includes two pairs of identical, spaced-apart flanges 32a and 32b. Each of the flanges includes detents 34. Each detent is adapted to rotatably capture a spindle 36 of its corresponding spool. The detent 34 is composed of two integral spring members 34a and 34b which deflect apart when the spindle 36 is inserted. After insertion, the spring members return to their free position and the spindle 36 is free to rotate, but is spatially retained within its corresponding flange.

Mounted on the cartridge is a non-volatile memory 60. This memory can be in the form of RAM with a permanent supply battery. One non-volatile memory that can be used is Dallas Semiconductor "Memory Button", part series 199x. The unit is a small battery-like can having two separable electrically conductive surfaces (60a and 60b). A two point electrical communication format allows for the communication to the battery-backed memory element in the device. Two electrically separated contacts disposed within the printer provide a communication link between the printer and cartridge when the cartridge is inserted into the printer. Sets of other electrical components can be assembled into the cartridge to provide non-volatile data storages. Communication between the smart cartridge and printer can be accomplished using two or more wires or by the use of opto-electrical or radio frequency communication.

Both the supply spool 20 and take-up spool 22 are identical in construction and so only one need be described. Each of these spools includes a cylindrical portion 38 about which the web-type carrier 14 is wound. Guard members 39 and 40 are respectively secured to the opposite ends of the central portion 38. Their purpose is to align the spooled carrier 14 between them. As shown, the spindles 36 extend outwardly from their respective guide members 39 and 40 and terminate in a free end. A gear member 24 is fixed to a spindle 36 and disposed between guide member 40 and the free end of a spindle 36. The gear 24 tooth design is such that a portion extends out beyond the face of the gear in a direction parallel to the axis of spindle 36. Two adjacent teeth form a groove along the face of the gear 24 nearest to the free end of the spindle 36. A coil spring 48 urges each spool so that the face grooves of the gears 24 engage ribs 50 formed on flange 34b to prevent the spools from rotating when the cartridge is removed from the printer. This is especially advanta-

geous during handling as it prevents the carrier 14 from unwinding.

When the cartridge is inserted into the printer, such as disclosed in commonly assigned U.S. Patent No. 4,723,133 to Walter, the non-volatile memory is electrically connected to the  $\mu$  computer 17 as shown.

The operation of the  $\mu$  computer 17 for controlling the operation of the printer 10 will now be explained with reference to the flowchart of FIG. 5.

The non-volatile memory 60 can be preprogrammed with a counter that indicates the number of sets remaining to be used. It will also contain color-adjustment data which will be transferred into RAM memory of microcomputer 17 to change the color and contrast information to modify the output color image based upon variations in the color dye density of the colored dye frames of the receiver from desired levels. For a more complete discussion of color signal processing which can be used in accordance with this invention, reference is made to commonly assigned U.S. Patent No. 4,786,917 to Hauschild et al.

Other functions are also initialized, but they will not be discussed since they are not necessary to understand the invention. The mechanism 15 advances the carrier until, in response to start of set signals provided by threshold detectors 17a and 17b, after the microprocessor 17 recognizes a start of series signal, it decrements the number of series remaining counter in memory 60. The carrier has been preexamined and a defect location map is stored in the memory 60 which indicates the location or position of each defective series of frames in the carrier 14. If a series is defective, and the cartridge is out of usable carrier (the number of sets remaining is "0"), the  $\mu$  computer 17 signals an indication on a display (not shown) that the cartridge 30 needs to be replaced. If a set remains, then the  $\mu$  computer 17 causes the drive mechanism to advance the carrier and the above process is repeated. When a series is not defective, the printer 10 would print an image in a receiver 12 as discussed above. During this time, the color correction data is used by the print head control circuitry to vary the actuation time of resistors 50 of the print head 18 as is well known in the art. After the print is made, if a series remains, the above process is repeated. If a non-defective carrier series does not remain, then the display will be caused to indicate that the cartridge is out of usable carrier.

When the cartridge 30 is removed from the printer to make, for example, special colored prints, after it is replaced the carrier 14 will be advanced until the first fresh (non-used) and non-defective series is presented under the print head 18. Everytime a cartridge is replaced, the above discussed initialization process takes place.

#### Claims

1. A thermal printer having a cartridge (30) containing a dye carrier (14), such carrier having repeating

series of spaced dye frames of different colors and a receiver (12) which receives dye from a series of dye frames to form a colored image, such printer including a print head (18) having a plurality of selectively actuatable elements (50), means (23) for moving the carrier and the receiver along respective paths so as to sequentially move each dye frame of a series and the receiver (12) relative to the print head (18) so that as the elements are actuated, dye from each dye frame of a series is transferred to the receiver and forms a colored image in the receiver, the printer being characterized in that it further comprises :

- a) means (A, B) for identifying each particular dye frame series in the carrier and producing a signal;
- b) non-volatile memory means (60) associated with each cartridge (30) and including data as to the location of each defective series of dye frames in the carrier; and
- c) computer means (17) responsive to the identifying signals and the stored defective series information for causing the carrier (14) and receiver (12) means to move only non-defective dye series frames in operative relation with the receiver when the print head is actuated.

2. The thermal printer of claim 1 wherein the non-volatile memory (60) includes color correcting data; and the computer means (17) responds to such color correction data to adjust the actuation of the elements (50) to compensate for variations in color density from desired levels.

3. A thermal printer having a cartridge (30) containing a dye carrier (14), such carrier having repeating series of spaced dye frames of different colors and a receiver (12) which receives dye from a series of dye frames to form a colored image, such printer including a print head having a plurality of selectively actuatable elements, means for moving the carrier (14) and the receiver (12) along respective paths so as to sequentially move each dye frame of a series and the receiver (12) relative to the print head (18) so that as the elements are actuated, dye from each dye frame of a series is transferred to the receiver (12) and forms a colored image in the receiver, the printer being characterized in that it further comprises:

- a) means (A, B) for identifying each particular dye frame series in the carrier and producing a signal;
- b) non-volatile memory means (60) associated with each cartridge and including color density correcting data; and
- c) computer means (17) responsive to the color correcting data to adjust the actuation of the

elements to compensate for variations in color density from desired levels.

fehlerfreie Farbfeldreihen dem Empfänger zuführen.

4. A cartridge for use in a printer of any of Claims 1 to 3 comprising:

a) means (20) for mounting a carrier (14) having repeating series of spaced dye frames; and  
b) non-volatile memory means (60) mounted on the cartridge and including data representative of corrective action to be taken by a printer to compensate for a characteristic of a particular dye frame of the carrier.

5. The cartridge of claim 4 wherein the data represents location of each defective series of dye frames in the carrier (14).

6. The cartridge of claim 4 wherein the data represents color density correcting data.

#### Patentansprüche

1. Thermodrucker mit einer Kassette (30), die einen eine sich wiederholende Reihe beabstandeter Felder unterschiedlicher Farben aufweisenden Farbstoffträger (14) und einen Empfänger (12) enthält, der zur Bildung eines Farbbildes von einer Reihe von Farbfeldern Farbstoff empfängt, wobei der Drucker einen eine Vielzahl von wahlweise betätigbaren Elementen (50) aufweisenden Druckkopf (18), Mittel (23) zum jeweiligen Bewegen des Farbstoffträgers und Empfängers entlang einer bestimmten Strecke, so daß jedes Farbfeld der genannten Reihe und der Empfänger (12) nacheinander relativ zum Druckkopf (18) bewegt werden und bei Betätigung der Elemente von jedem Farbfeld der genannten Reihe Farbstoff auf den Empfänger übertragen wird, der auf dem Empfänger ein Farbbild erzeugt, dadurch gekennzeichnet, daß der Drucker zusätzlich folgende Komponenten aufweist:

a) Mittel (A, B) zur Identifizierung jeder einzelnen Farbfeldreihe auf dem Farbstoffträger und zum Erzeugen eines Signals;

b) einen jeder Kassette (30) zugeordneten nichtflüchtigen Speicher (60), der Daten bezüglich der Lage jeder defekten Farbfeldreihe auf dem Farbstoffträger beinhaltet; und

c) einen Rechner (17), der auf die Identifizierungssignale und die gespeicherte Information über defekte Reihen anspricht und bewirkt, daß bei Betätigung des Druckkopfes der Farbstoffträger (14) und der Empfänger (12) nur

2. Thermodrucker nach Anspruch 1, dadurch gekennzeichnet, daß der nichtflüchtige Speicher (60) Farbkorrekturdaten enthält und der Rechner (17) auf diese anspricht, um die Betätigung der Elemente (50) anzupassen und Unterschiede in der Farbdichte innerhalb erwünschter Stufen auszugleichen.

3. Thermodrucker mit einer Kassette (30), die einen eine sich wiederholende Reihe beabstandeter Felder unterschiedlicher Farben aufweisenden Farbstoffträger (14) und einen Empfänger (12) enthält, der zur Bildung eines Farbbildes von einer Reihe von Farbfeldern Farbstoff empfängt, wobei der Drucker einen eine Vielzahl von wahlweise betätigbaren Elementen aufweisenden Druckkopf, Mittel zum jeweiligen Bewegen des Farbstoffträgers (14) und Empfängers (12) entlang einer bestimmten Strecke, so daß jedes Farbfeld der genannten Reihe und der Empfänger (12) nacheinander relativ zum Druckkopf (18) bewegt werden und bei Betätigung der Elemente von jedem Farbfeld der genannten Reihe Farbstoff auf den Empfänger (12) übertragen wird, der auf dem Empfänger ein Farbbild erzeugt, dadurch gekennzeichnet, daß der Drucker zusätzlich folgende Komponenten aufweist:

a) Mittel (A, B) zur Identifizierung jeder einzelnen Farbfeldreihe auf dem Farbstoffträger und zum Erzeugen eines Signals;

b) einen jeder Kassette zugeordneten nichtflüchtigen Speicher (60), der Farbdichtekorrekturdaten enthält;

c) einen Rechner (17), der auf die Farbkorrekturdaten anspricht, um die Betätigung der Elemente anzupassen und Unterschiede in der Farbdichte innerhalb erwünschter Stufen auszugleichen.

4. Kassette zur Verwendung in einem Drucker nach einem der Ansprüche 1 - 3, gekennzeichnet durch

a) Mittel (20) zum Anbringen eines Farbstoffträgers (14), der sich wiederholende Reihen beabstandeter Farbfelder aufweist; und

b) einen an der Kassette angebrachten nichtflüchtigen Speicher (60), der Daten enthält, die durch den Drucker zu ergreifende Korrekturmaßnahmen darstellen, um ein Merkmal eines bestimmten Farbfeldes des Farbstoffträgers auszugleichen.

5. Kassette nach Anspruch 4, dadurch gekennzeichnet, daß die Daten die Lage jeder fehlerhaften Reihe von Farbfeldern im Farbstoffträger (14) darstellen.
6. Kassette nach Anspruch 4, dadurch gekennzeichnet, daß die Daten Farbdichtekorrekturen darstellen.

#### Revendications

1. Imprimante thermique comportant une cartouche (30) comprenant un support de colorant (14), un tel support comportant des séries répétitives de plages espacées de colorants de différentes couleurs et un récepteur (12) qui reçoit le colorant à partir d'une série de plages de colorants afin de former une image couleur, une telle imprimante comprenant une tête d'impression (18) comportant une pluralité d'éléments sélectivement activables (50), un moyen (23) pour déplacer le support et le récepteur le long de trajets respectifs de façon à déplacer séquentiellement chaque plage de colorant d'une série et le récepteur (12) par rapport à la tête d'impression (18) d'une manière telle qu'à mesure que les éléments sont activés, le colorant provenant de chaque plage de colorant d'une série est transféré au récepteur et forme une image couleur dans le récepteur, l'imprimante étant caractérisée en ce qu'elle comprend de plus :

(a) un moyen (A, B) pour identifier chaque série de plages de colorants particulière dans le support et pour produire un signal ;  
 (b) une mémoire rémanente (60) associée à chaque cartouche (30) et contenant des données quant à l'emplacement de chaque série défectueuse de plages de colorants dans le support ; et  
 (c) un ordinateur (17) répondant aux signaux d'identification et aux informations de série défectueuses mémorisées pour amener le support (14) et le moyen de récepteur (12) à déplacer seulement les plages de séries de colorants non défectueuses en relation fonctionnelle avec le récepteur lorsque la tête d'impression est activée.

2. Imprimante thermique selon la revendication 1, dans laquelle la mémoire rémanente (60) inclut des données de correction de couleur ; et l'ordinateur (17) répond à ces données de correction de couleur afin d'ajuster le temps d'activation des éléments (50) pour compenser les variations de densité de couleur par rapport aux niveaux désirés.
3. Imprimante thermique comportant une cartouche (30) contenant un support de colorant (14), un tel support comportant des séries répétitives de pla-

ges espacées de colorants de couleurs différentes et un récepteur (12) qui reçoit le colorant à partir d'une série de plages de colorants afin de former une image couleur, une telle imprimante comprenant une tête d'impression comportant une pluralité d'éléments sélectivement activables, un moyen pour déplacer le support (14) et le récepteur (12) le long de trajets respectifs de façon à déplacer séquentiellement chaque plage de colorant d'une série et le récepteur (12) par rapport à la tête d'impression (18) d'une manière telle qu'à mesure que les éléments sont activés, le colorant provenant de chaque plage de colorant d'une série est transféré au récepteur (12) et forme une image couleur dans le récepteur, l'imprimante étant caractérisée en ce qu'elle comprend de plus :

a) un moyen (A, B) pour identifier chaque série de plages de colorants particulière dans le support et pour produire un signal ;  
 b) une mémoire rémanente (60) associée à chaque cartouche et incluant des données de correction de densité de couleur ; et  
 c) un ordinateur (17) répondant aux données de correction de couleur pour ajuster le temps d'activation des éléments afin de compenser les variations de densité de couleur par rapport aux niveaux désirés.

4. Cartouche pour utilisation dans une imprimante selon l'une quelconque des revendications 1 à 3 comprenant :

a) un moyen (20) pour monter un support (14) comportant des séries répétitives de plages espacées de colorants ; et  
 b) une mémoire rémanente (60) montée sur la cartouche et incluant des données représentatives de l'action corrective qui doit être prise par une imprimante afin de compenser une caractéristique de plage de colorant particulier du support.

5. Cartouche selon la revendication 4, dans laquelle les données représentent l'emplacement de chaque série défectueuse des plages de colorants dans le support (14).
6. Cartouche selon la revendication 4, dans laquelle les données représentent les données de correction de densité de couleur.

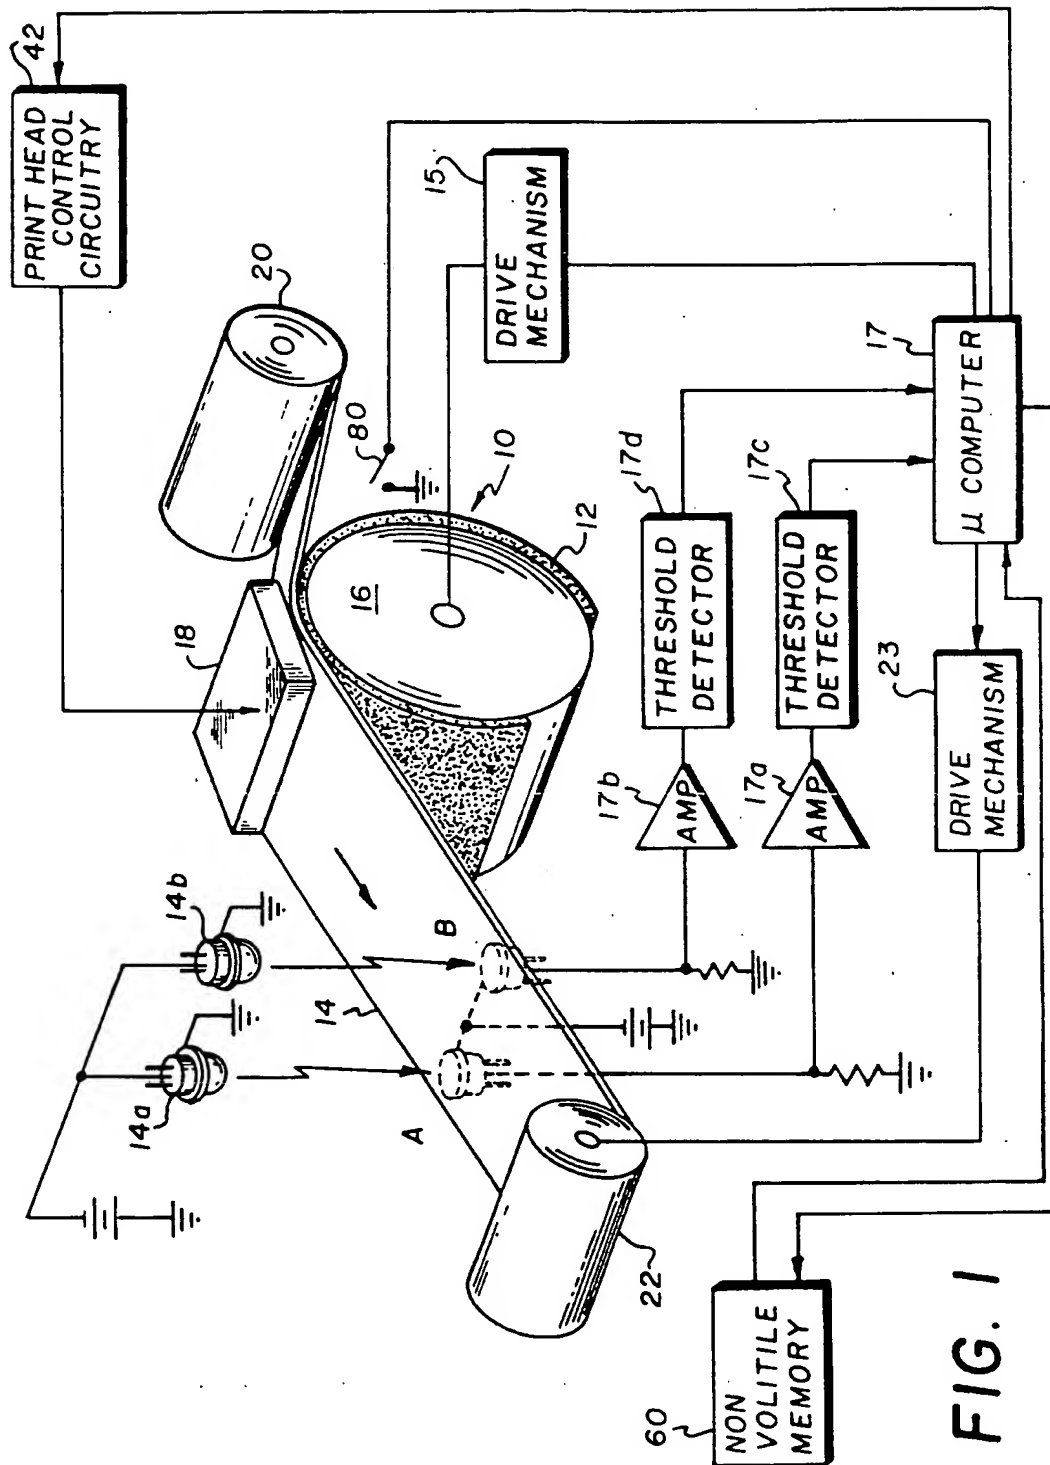


FIG. 1

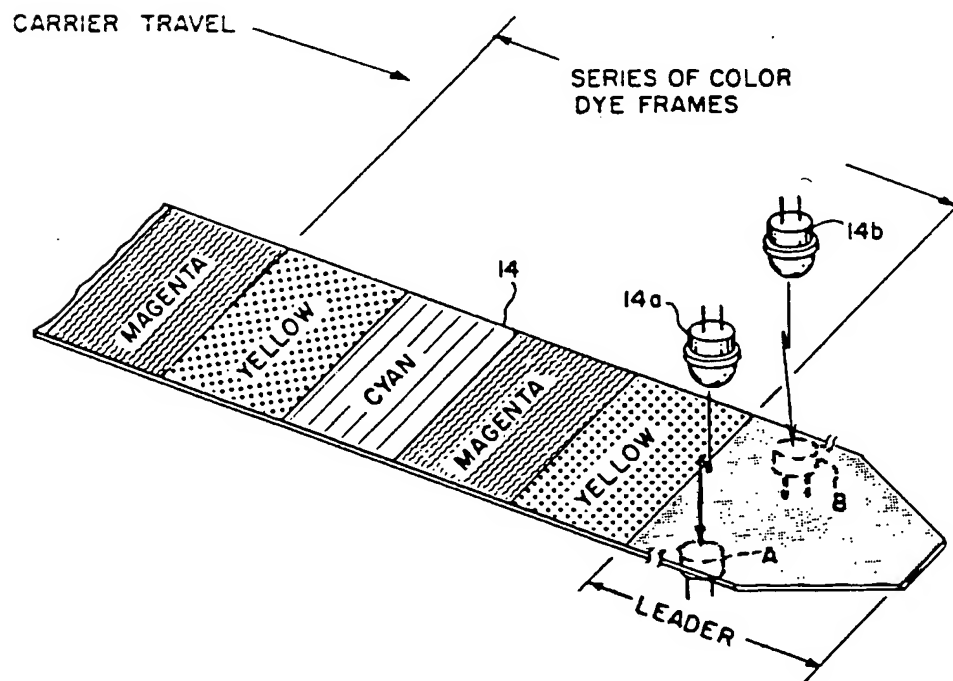
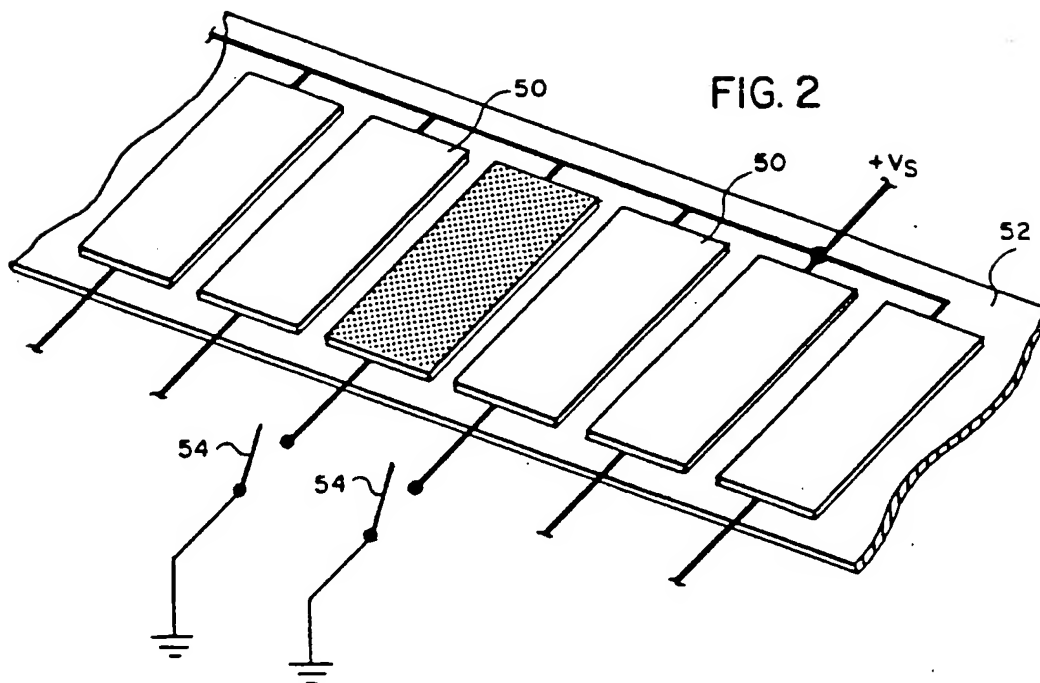
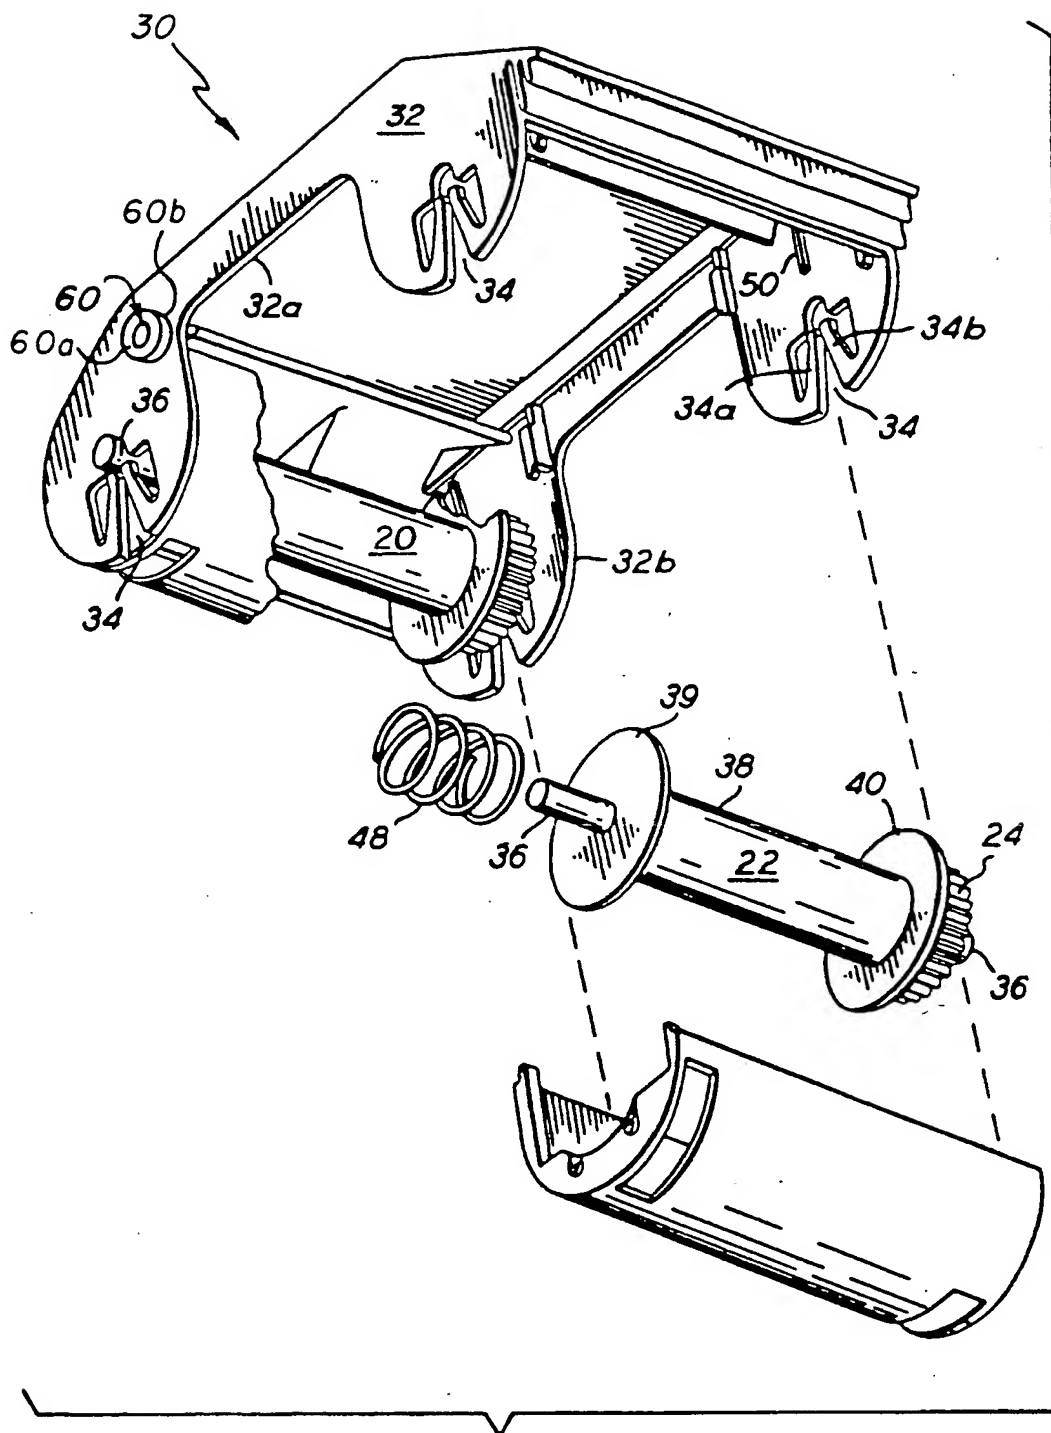


FIG. 3



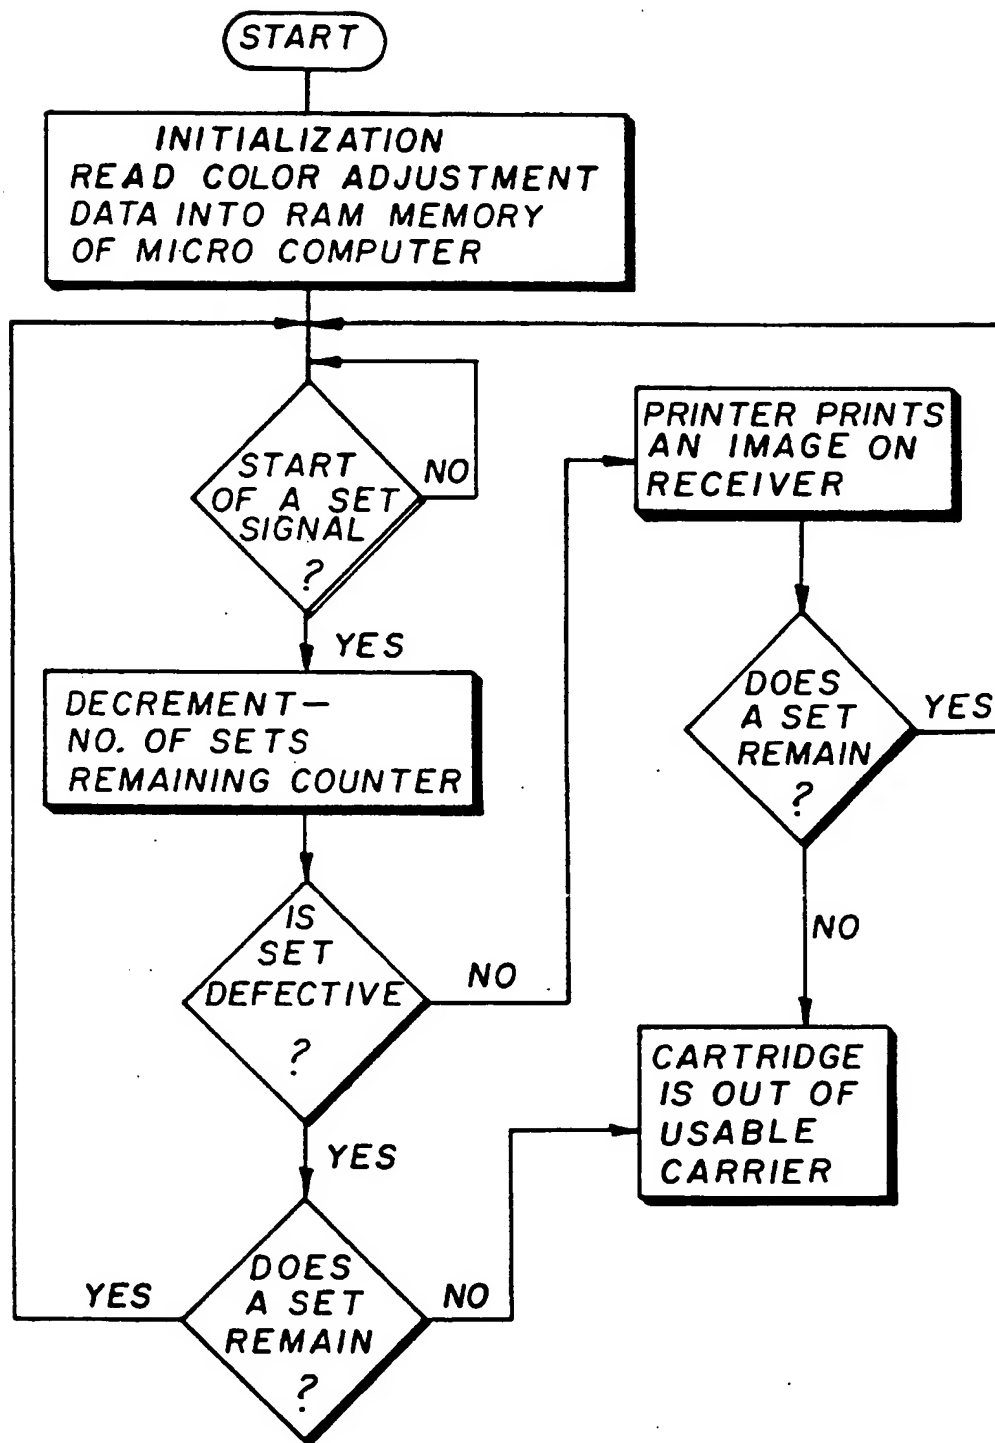


FIG. 5